

Info :

Un projecteur se définit par sa puissance lumineuse et aussi par son angle. Le fait d'avoir une optique va permettre d'allonger la portée du faisceau, en concentrant son faisceau, mais cela réduit sa largeur d'éclairage. Il convient donc de bien choisir son modèle en fonction de la position du projecteur et de ce que l'on veut éclairer.


Product info:

A floodlight is defined by its lighting power and also by the beam angle.
Having an optical lens will permit to concentrate the light and increase the range, but that reduces the width of lighting. You shall then carefully select your model according to the unit position and what you want to enlight.

Corps en Aluminium 6082 usiné dans la masse brossé, anodisé et visserie inox 316L.
Technologie de Led Cree® : qualité de lumière optimum
Régulés 9-30 VDC - Consommation réduite.

Specifications:

Made in anodised machined matt brushed 6082 aluminium and 316L stainless steel.
Cree® Led technology for optimum lighting quality, Regulated 9-30VDC. Low power consumption.

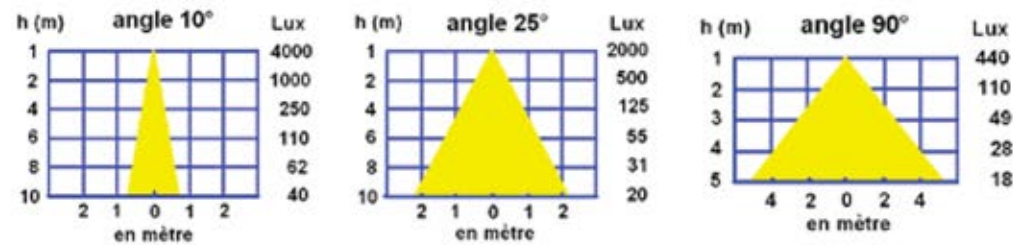

Éclairage de cockpit / Cockpit spotlight



Dimensions (mm) Dimensions (mm)	Ø 110 x H 45	Ø 110 x H 45
Puissance & Intensité Lighting Power & intensity	600 lm - 400 Cd	900 lm - 600 Cd
Angle diffusion Beam Angle	90°	90°
Consommation électrique Power Consumption	10 W	15 W
Poids Weight	820 g	820 g
Références References	01072	01073

